



Cambridge

- CONSTRUCTION
- Steel doors with PVC overlays

THICKNESS


INSULATION




Panel Designs



CAMBRIDGE CS



CAMBRIDGE CM



CAMBRIDGE CL

Colors




Overlay Colors



Section Heights


Due to the architecture, section heights are not identical.

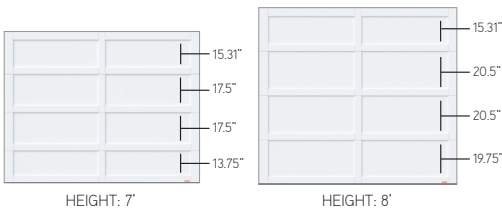


Construction details

	Cambridge
Insulation Level	R-16
Thickness	1 3/4" door + 5/8" overlays
Steel Gauge	26
Widths	8'-18'
Door Heights	6'6"-8'
Section Heights	18", 21", 24"

3 layers with polyurethane insulation



InterLok™ joints block air infiltration for superior thermal insulation



Polyurethane insulation acts as a thermal break to prevent transfer of cold or heat



Wood end blocks are one of the most effective thermal breaks



LaserCraft™ Technology is used for a precise fit between **overlays** and our Permafix™ Process literally fuses them to the steel sections.


Construction

Warranty


Limited lifetime warranty (25 years)

Windows


Panoramic



8 LITES¹




4 VERTICAL LITES




WITHOUT GRIDS


Glass types



CLEAR²



WHITE
SANDBLASTED



PINHEAD
(0/5 = clear, 5/5 = opaque)

¹ Not available for Cambridge CM and CS layouts. ² Clear 40" x 13" thermopane glass is also available with the Low-E Argon energy option.

Panoramic window frames are not insulated and are made from extruded aluminum that is always finished in white on the interior of the section. From the outside, the extrusion will be hidden by the decorative overlays.