

Carriage Style with Overlays

EPS 2026-OVLY

INSULATION R-8.9

THICKNESS 2"

EPS 1526-OVLY

INSULATION R-7

THICKNESS 1 1/2"





A DESIGN, 16' X 8', BEIGE DOORS AND WHITE OVERLAYS, RICHMOND WINDOWS

Luxurious and elegant overlays

Elevate your home's exterior with these exclusive garage doors. Combine steel doors with refined composite overlays that merge timeless charm with modern strength. They add lasting value and create an inviting, sophisticated look that will make every arrival feel special.



Panel colors¹

WHITE	SAHARA
ALMOND	SANDSTONE
BEIGE	TERRASTONE
SEPIA	BROWN
BLACK ICE	GREEN

Overlay color

WHITE



IO DESIGN, 8' X 8' AND 16' X 8', WHITE, RICHMOND WINDOWS

Designs

IO	I1	I2
A	X	V

Enhance your door with decorative hardware



STANDARD

Windows

PLAIN LONG	STOCKTON ARCH
RICHMOND	STOCKTON
RICHMOND ARCH	
RICHMOND ARCH / RICHMOND	
STOCKTON ARCH / STOCKTON	

Types of glass

	4/5
SATIN	
	4/5
PINHEAD	
	0/5
CLEAR	
	1/5
TINTED	


(0/5 = clear, 5/5 = opaque)

¹ All colors are available in R-8.9 (2") and R-7 (1 1/2") doors.

Construction details

Door Model	EPS 2026-OVLY	EPS 1526-OVLY
Insulation Level	R-8.9	R-7
Thickness	2"	1 1/2"
Ext. Steel Gauge	26	26
Widths	6'-20'2"	6'-18'2"
Door Heights*	6'-16'	6'-14'
Section Heights	18", 21", 24"	18", 21", 24"

4 layers with polystyrene insulation

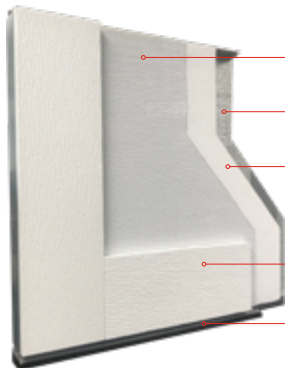

- Woodgrain embossment for an attractive appearance
- 26-gauge galvanized steel bonded to EPS foam
- Polystyrene insulation
- 5/8" white woodgrain composite overlay
- "U" shaped weather seal

Construction

Additional features:

- Uniform embossed woodgrain, hot-dipped galvanized steel, pre-finished inside and out, then coated with a baked-on polyester primer and acrylic finish
- Keyed or slide lock set
- 10-ball rollers for quiet operation
- Environmentally friendly polystyrene insulation
- Tongue-and-groove section joints creating a weather-resistant seal against rain, snow, and wind
- Durable PVC seals providing a continuous thermal break at all section joints, reducing thermal transmission
- Full-height 20-gauge hot-dipped galvanized stiles for superior strength and durability compared with commonly used hinge plates
- 14-gauge hot-dipped galvanized steel hinges for lasting durability
- Corrosion-resistant aluminum weather-seal retainer

* Other sizes available by custom order. Contact your dealer.



Tested in our certified Innovation Center, our doors resist strong winds. Our wind load reinforcement comes in multiple sizes and pressure ratings and meets Florida Building Code, Texas TDI and International Building Code requirements.

Warranty

Door: limited lifetime depending on the model. See the full warranty guide for model-specific details.

Smart and quiet openers

LiftMaster®

POWERED BY myQ®

PREMIUM SERIES®



- Ultra quiet
- Belt or chain drive
- 1 1/4 HP, DC power
- Integrated 360° camera & battery backup



- Ultra quiet
- Jackshaft
- DC power
- Integrated battery backup



PLUS SERIES®



- Quiet
- Belt drive
- 1 HP, DC power
- Integrated 360° camera & battery backup



BASIC SERIES®



- Chain drive
- 3/4 HP, DC power
- Integrated camera



The colors are as exact as printing allows. The clarity of the wood grain and designs is optimized to provide a photographic rendering, not identical to the actual appearance. Please request a color sample. Trademarks and registered trademarks of Garaga Inc. are denoted by ®, ™, ® and ® respectively. © Garaga Inc. 2026 - All rights reserved - Printed in Canada - 95MD015/07/2026

logo FSC



Garage doors made easy.

1-800-464-2724
info@garaga.com
garaga.com

YOUR
GARAGA
DEALER