

OBI & OB 2024HD Series

1 Steel Skin

Insulated and non-insulated

A cost-effective solution designed for utility, agricultural, and storage projects.



OB 2024HD, 10' X 10', COMMERCIAL WHITE

OBI 2024HD

R-7.2

2" THICK

WIDTH
|↔| 5'-30' (1.5 m-9.14 m)

HEIGHT
|↑↓| 6'-22' (1.8 m-6.7 m)

WEIGHT
|📊| 1.59 lb/ft² (7.8 kg/m²)

OB 2024HD

Non-insulated


2" THICK

WIDTH
|↔| 5'-30' (1.5 m-9.14 m)

HEIGHT
|↑↓| 6'-22' (1.8 m-6.7 m)

WEIGHT
|📊| 1.44 lb/ft² (7.0 kg/m²)

Colour

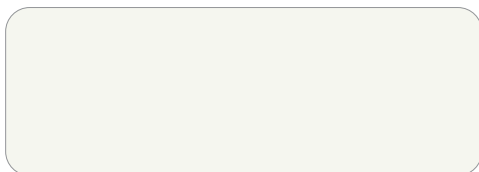

COMMERCIAL WHITE

Panel design



DEEP GROOVES





OBI 2024HD, 12' X 14', COMMERCIAL WHITE


Windows



Sizes: 25" x 13" or 24" x 6". Clear glass with Black frame only.

Lifetime limited warranty

1 year: Against structural failures.

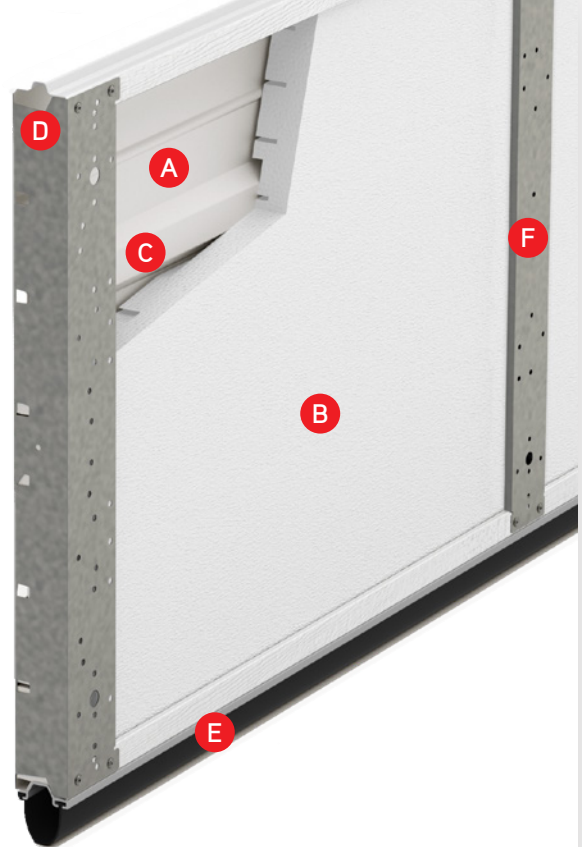

Panel construction

- A 24-ga hot-dipped galvanized steel wall**
Corrosion-resistant, finished with baked-on polyester paint (can be repainted).
- B 2" open-back door construction**
Available non-insulated or with CFC-free polystyrene insulation protected by a vinyl backing (R-7.2).
- C Deep-grooved steel walls**
½" deep and 2" wide horizontal grooves, with alternating smaller grooves, for greater strength and bending resistance.
- D Tongue & groove section joints**
Provide seamless fit and improved rigidity.
- E Bottom weatherstripping**
Continuous astragal made of U-shaped flexible vinyl and held in place by an aluminum retainer.
- F Vertical center and end stiles**
18-ga galvanized steel, fully hemmed edges for added strength and safety, pre-punched holes for precise hinge and strut attachment.

The colours are as exact as printing allows. The clarity of the wood grain and designs is optimized to provide a photographic rendering, not identical to the actual appearance. Please request a colour sample. Trademarks and registered trademarks of Garaga Inc. are denoted by TM, ® and © respectively. © Garaga Inc. 2026 - All rights reserved - Printed in Canada - 95013C/10/2026



Garage doors made easy.

1-866-960-2828
info@garaga.com
garaga.com