

Sandwich Door Series

Uniform Woodgrain

Flush

Three insulation levels. One strong construction built to last.



EPS 3026MD, 12' X 14', WHITE, 24" X 8" STANDARD COMMERCIAL WINDOW

Medium Duty

EPS 3026MD

R-15.1

3" THICK

GAUGE
EXT. 26

WIDTH
|<=> 6'-30'2"

HEIGHT
|<=> 7'-20'

EPS 2026MD

R-8.9

2" THICK

GAUGE
EXT. 26

WIDTH
|<=> 6'-24'2"

HEIGHT
|<=> 7'-20'

EPS 1526MD

R-7

1 1/2" THICK

GAUGE
EXT. 26

WIDTH
|<=> 6'-18'2"

HEIGHT
|<=> 7'-14'

Colors



WHITE



SAHARA



SANDSTONE



TERRASTONE



BROWN



BLACK ICE



ALMOND



BEIGE




SEPIA



GREEN

Panel design



FLUSH



Tested in our certified Innovation Center, our doors resist strong winds. Our wind load reinforcement comes in multiple sizes and pressure ratings and meets the Florida Building Code, Texas TDI and International Building Code requirements.


Windows

Standard Commercial




Windows: 24" x 12" or 24" x 8". Glass: 1/2" Clear, double-pane. Frames: White and Black.


Long (41" x 16")

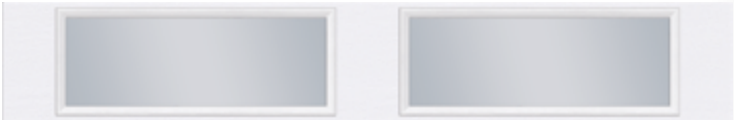

Short (20" x 13")



Types of glass

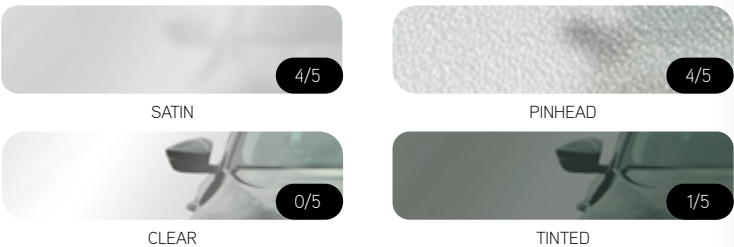


(0/5 = clear, 5/5 = opaque)

Lite options

Types of glass	Materials	Single-Pane Annealed	Single-Pane Tempered	Double-pane Annealed	Double-pane Tempered
Standard Commercial windows					
24" x 12", Clear				●	
24" x 8", Clear				●	
Long windows					
Clear		●	●	●*	●*
Satin		●	●	●*	●*
Tinted		●	●	●*	●*
Pinhead		●	●	●*	●*
Short windows					
Clear		●		●*	●
Satin		●		●*	●
Tinted		●		●*	●
Pinhead		●		●*	●

* When the doors have windows, EPS 3026MD maximum width is 24'2" and EPS 2026MD maximum width is 20'2"
● = Available with the 3 models
● = Available with EPS 1526MD and EPS 2026MD doors
● = Available with EPS 3026MD and EPS 2026MD doors

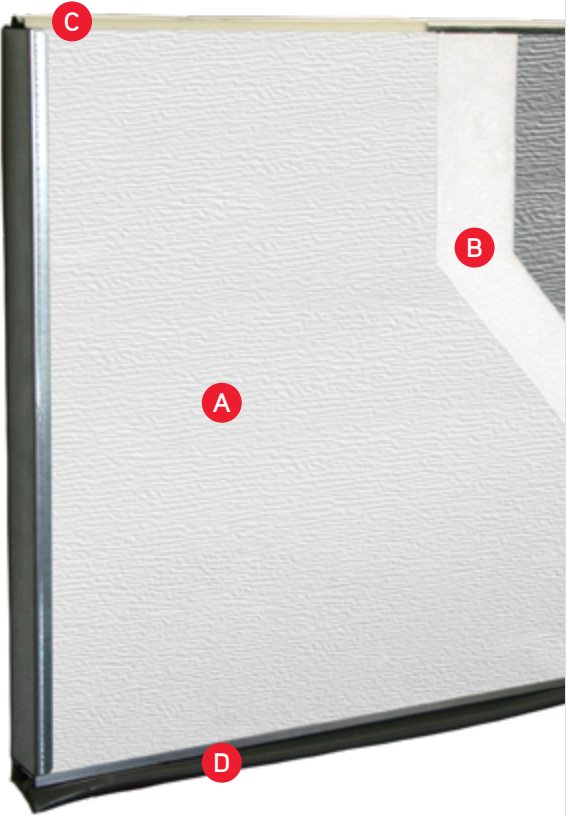

Panel construction

- A 26-ga Hot-dipped galvanized uniform woodgrain steel**
Prefinished inside and out, then coated with baked-on polyester primer and acrylic finish.
 - B Polystyrene insulation**
Bonded to 26-ga steel skin, providing thermal protection to the edge of each section.
 - C Tongue & groove section joints**
Create a weather-resistant seal against rain, snow, and wind.
 - D Bottom weatherseal**
Continuous astragal made of U-shaped flexible vinyl and held in place by an aluminum retainer (black PVC retainer optional).
- 14-ga Hinges**
Provide lasting durability.
- 20-ga Hot-dipped galvanized center stiles**
Recessed, concealed and extending the full height of the section for superior strength and durability.



1-800-464-2724
garaga.com

Garage doors made easy.

YOUR
GARAGA
DEALER