

## Features/Benefits



### Battery Backup

Works when the power is out.  
Provides up to 500 cycles on battery backup.  
Powers safety devices and ancillary devices.



### Security+ 2.0™ Technology

Double the range of standard transmitters.  
Multi frequency radio virtually eliminates interference. Receiver holds up to 50 remotes.  
Homelink® compatible version 4 and higher.

Key release  
for manual operation

### Heavy Duty DC Motor with Soft Start/Stop Operation

Powerful enough to perform in the most demanding applications, soft start/stop operation extends operator and hardware life under heavy gate use.



### Simple-to-Set Electronic Limit System

Maintains accurate gate position throughout gate travel. Maintains open and close limit position at all times, even after using manual disconnect.

### Keyed Manual Disconnect

Provides simple method to manually operate gate



### Plug-in Loop Detectors

Easy to install, simple to program.  
8 different settings, including boost.  
Innovative technology eliminates crosstalk.  
Inputs for shadow, interrupt and exit loops.



### Fire Department Compliant

Selectable settings allow gate to auto-open upon loss of AC power or battery depletion

### Programmable Auxiliary Relays

Save time and money when adding on auxiliary devices.

2 programmable relays with 6 settings each simplify adding additional features.

- Pre-warning or gate in motion sounder
- Switch on/off devices at open or close limits

Molecularly bonded  
coating never needs lubrication

High-Impact  
Polycarbonate electrical enclosure



### External Obstruction Sensing

Complies with UL325 safety code. Inputs are provided to simplify secondary non-contact or contact sensors such as photo-eyes and edge devices. Installer will recommend best secondary entrapment device for the application.

Full-Length Commercial  
Duty Aluminum Cast housing



### Bi-Part Delay

Selectable dual gate operation  
**Standard Operation** – Simultaneously closes gates at the same time.  
**Synchronized close** – Monitors the speed and position of each wing and adjusts the speed as necessary to ensure primary gate closes last, avoiding potential damage to the gate.



### Exceptional Standby Time

Our battery backup lasts for 14 days.  
10 seconds after the gate closes, all non-essential ancillary devices turn off to conserve power.



### True Power Management System

**Protects Battery Life.** Recovers batteries quicker when discharged and manages the low power threshold. Will not run the batteries beyond the point of failure, ensuring batteries are ready for the next time they are needed



### Solar Ready

Plug in to the power of the sun.  
Consult your local dealer for more details.  
Home and Property Owners can qualify for a 30% Tax credit



### Advanced Traffic Management Control

**Discourages tailgating**  
**Quick Close** – Closes the gate immediately after a vehicle pulls off the interrupt loop.  
**Anti-Tailgate** – Prevents unauthorized access. Gate will pause when closing as vehicle pulls onto interrupt loop or breaks photo beam. Once vehicle backs up, gate will continue to close.

## MyQ™ Enabled Accessories

LiftMaster's revolutionary MyQ™ technology is designed with simple mobile access control in mind. The new LiftMaster® model LA500 comes with MyQ™ technology built-in. Pair it with our LiftMaster® Internet Gateway accessory to remotely monitor or open or close your gate from anywhere in the world with one click on your Internet-enabled mobile phone or computer.



### LiftMaster® Internet Gateway (model 828LM)

LiftMaster's revolutionary new accessory features built-in MyQ™ technology that connects to the Internet and allows you to monitor and control your gate operator from anywhere in the world via your internet-enabled mobile phone or computer.



### Garage Door and Gate Monitor (model 829LM)

Lets you check and close the gate operator from any room in your house.



### Remote Light Control (model 825LM)

Control your house lights and operate any lamp with your remote control or from your Internet-enabled smart phone via your LiftMaster® Internet Gateway

LiftMaster® Internet Gateway Accessory functionality is dependent on communication with MyQ™ enabled gate operator. MyQ™ communication can be limited by distance and type of exterior building materials. A general range estimate is 300 feet.



# LiftMaster®



# LA500

RESIDENTIAL / LIGHT  
COMMERCIAL DC SWING  
GATE OPERATOR

## Specifications

### Power

110V or 220V Single Phase  
(220V requires optional  
torroid transformer)

### Accessory Power

24VDC 500mA output  
Switched & Unswitched Power

### Surge

Industrial strength suppression  
on high and low voltage inputs

### Operator Duty Rating

300 cycles per day

### Temperature Specifications

-40°F (-40C) to 140°F (60C)

### Gate Travel Speed

90 degree opening in  
15-17 seconds

### Warranty

2 Year Warranty

## Construction

### Chassis

Commercial duty aluminum die  
cast housing

### Motor

24VDC continuous-duty motor

### Worm Gear Reduction

Precision machined all metal gear in  
contained lubrication housing

### Operator Weight

Actuator Arm 25lbs  
Standard Control box 20lbs  
-Includes (2) 7AH batteries  
XL Control Box 31lbs  
- Batteries ship separate

## Add to Your System



**EL25 & TAC1**  
Single/Multi-Tenant Telephone Entry System




**828LM**  
LiftMaster® Internet Gateway



**829LM**  
Garage Door and Gate Monitor



**LOOPDETLM**  
LiftMaster® Plug-in Loop Detector



**LA500SLRPKG**  
Solar Package



**LA500CONTXLM**  
XL Metal Control Box




**CPS UN4**  
Thru-Beam Photo-Eyes



**G65 MGR20**  
Safety Edges

FOR MORE ACCESSORIES GO TO [LIFTMASTER.COM](http://LIFTMASTER.COM)

## Recommended Capacities

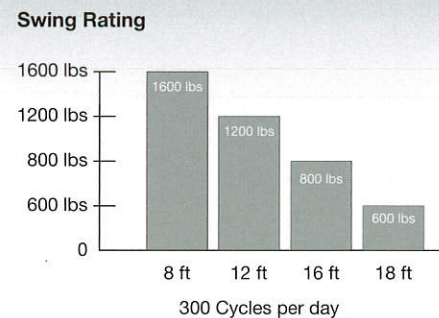


## Battery Backup Operation

BATTERY	CYCLES
2 - 7Ah	500

12 ft / 800 lbs Swing Gate

## Dimensions

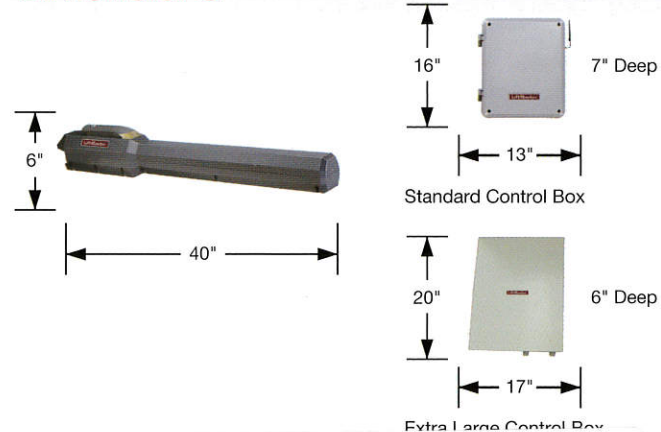

# LiftMaster®

The Chamberlain Group, Inc. • 845 Larch Avenue • Elmhurst, IL 60126  
[www.LiftMaster.com](http://www.LiftMaster.com)  
ISO 9001 Certified Manufacturer



Follow us on Facebook, Twitter and YouTube!



©2012 LM CSW24V 04/12  
The Chamberlain Group, Inc.  
Printed in U.S.A.

Le Spécialiste des portes Exitech  
26 rue Valcourt  
Gatineau (Québec) J8T 8T8  
Tel : 819.561.0135 Fax : 819.561.6787  
[www.exitech.ca](http://www.exitech.ca)

# ELITE SERIES®

# LA500

RESIDENTIAL / LIGHT  
COMMERCIAL DC SWING  
GATE OPERATOR



## Engineered to Work Every Time. Built to Last Over Time.

LiftMaster swing gate operators are built to perform in the most demanding applications. Synonymous with quality, dependability, and award-winning designs that meet / exceed UL-325 safety standards; LiftMaster's Elite Series is recognized as the undisputed leader in gate operator technology.

The LA500 model is our most advanced residential DC swing gate operator. It is equipped with industry-leading features like MyQ and Security+ 2.0 communications, battery backup, and capacity to handle gates up to 18 feet and 1600 lbs.

With a network of more than 8,000 professional dealers and 100 years' of access experience, it's no wonder that homeowners trust LiftMaster to provide security and control for their residential applications.



### • Battery Backup

Uninterrupted access  
when the power is out

### • Security+ 2.0™ technology

2X the range of standard  
remotes

### • MyQ™ technology provides the ability to remotely monitor and activate your gate from anywhere in the world via an Internet-enabled mobile phone or computer



# LiftMaster®

**WARNING:**  
To reduce the risk of injury to persons - When the LiftMaster® Internet Gateway is used with garage door openers, the operator must be installed with sectional doors. The LiftMaster® Internet Gateway is ONLY compatible with the following gate operators: Models CSW24V, CSL24V and LA500. Always design, install and maintain safe gate access systems in accordance with UL325 & ASTM F2200 standards.

LMGTBRLA50